


NOTES:

1. RETENTION AREAS WILL BE SET AS PART OF THE REVIEW PROCESS AND PRECONSTRUCTION MEETING.
2. BOUNDARIES OF RETENTION AREAS MUST BE STAKED AT THE PRECONSTRUCTION MEETING AND FLAGGED PRIOR TO ROOT PRUNING.
3. EXACT LOCATION OF ROOT PRUNING SHALL BE DETERMINED IN THE FIELD IN COORDINATION WITH THE FORESTRY INSPECTOR.
4. EXCAVATED AREA MUST BE IMMEDIATELY BACK FILLED WITH EXCAVATED SOIL OR OTHER ORGANIC SOIL AS SPECIFIED PER PLAN OR BY THE FORESTRY INSPECTOR.
5. ROOTS SHALL BE CLEANLY CUT USING VIBRATORY KNIFE OR OTHER ACCEPTABLE EQUIPMENT. ROOT PRUNING METHODS AND MEANS MUST BE IN ACCORDANCE WITH ANSI STANDARD A3000.
6. ALL PRUNING MUST BE EXECUTED AT LOD SHOWN ON PLANS OR AS AUTHORIZED BY THE FORESTRY INSPECTOR.
7. SUPPLEMENTAL WATERING MAY BE REQUIRED FOR ROOT PRUNED TREES THROUGHOUT THE GROWING SEASON DURING CONSTRUCTION AND SUBSEQUENT WARRANTY AND MAINTENANCE PERIOD.



TREE PROTECTION FENCE TO BE ERECTED IN LINE WITH ROOT PRUNING LIMITS. FENCE, ROOT PRUNING LINE, AND LOD ARE THE SAME LINE. SEE DETAIL A-6 FOR FENCE SPECIFICATIONS.

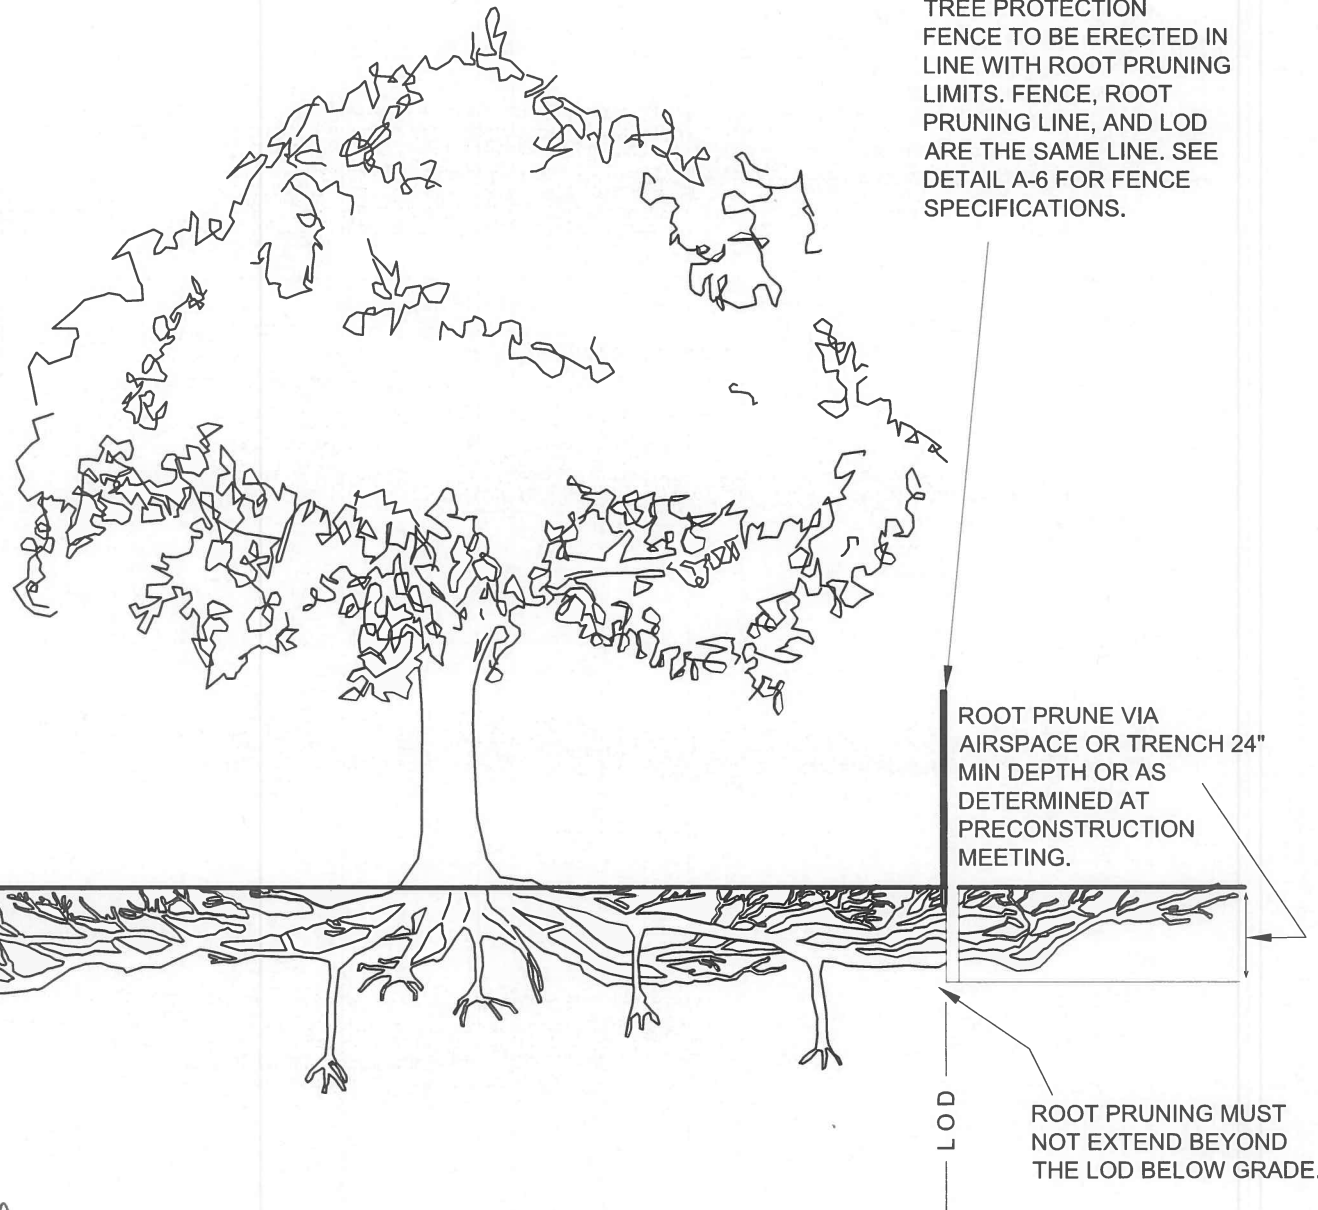

APPROVED BY:

W. Wall
CITY FORESTER

DATE:

3/30/17

ROOT PRUNING DETAIL

DETAIL
A-3